



# Catalogue Butterfly valves

April 2010

Pressure Piping Systems  
for Water Applications



# PVC-U butterfly valves & kits

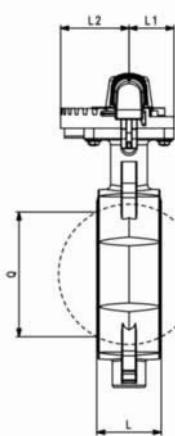

## Lever-operated butterfly valve PVC-U With EPDM/SANTOPRENE™ gaskets

- On request:

- stem and guide bushing in stainless steel
- bare shaft + fixing actuator bracket



d [mm]	DN [mm]	DN [inch]	PN	Code	SP	GP	kg	
75	65	2 ½	10	VFA02D750	1	-	1.300	
90	80	3	10	VFA02D900	1	-	1.294	
110	100	4	10	VFA02D910	1	-	1.500	
125 - 140	125	5	10	VFA02D920	1	-	2.300	
160	150	6	10	VFA02D940	1	-	3.380	
200 - 225	200	8	6	VFA02D960	1	-	5.400	

d [mm]	E [mm]	Q [mm]	H [mm]	H1 [mm]	H2 [mm]	H3 [mm]	H4 [mm]	L [mm]	L1 [mm]	L2 [mm]	L3 [mm]	
75	112	46	246	76	115	55	43	46	46	70	220	
90	128	64	267	92	120	55	43	48	46	70	220	
110	152	84	291	106	130	55	43	54	46	70	220	
125 - 140	177	108	321	116	150	55	43	63	46	70	250	
160	212	133	356	131	169	55	43	63	46	70	250	
200 - 225	260	180	433	163	209	61	43	74	46	70	282	

PF 2 02 960 010



## Lever-operated butterfly valve PVC-U With free flanges kit With EPDM/SANTOPRENE™ gaskets



d [mm]	DN [mm]	DN [inch]	PN	Code	SP	GP	kg	
75	65	2 ½	10	VFA02D75K	1	-	4.650	
90	80	3	10	VFA02D90K	1	-	4.879	
110	100	4	10	VFA02D91K	1	-	5.858	
125	125	5	10	VFA02D92K	1	-	7.100	
140	125	5	10	VFA02D93K	1	-	10.850	
160	150	6	10	VFA02D94K	1	-	11.930	
200	200	8	6	VFA02D96K	1	-	13.950	
225	200	8	6	VFA02D97K	1	-	13.950	

PF 2 02 960 010





**Butterfly valve reduction gear  
With handwheel PVC-U  
With EPDM/SANTOPRENE gaskets**



\* with metal reduction gear

d [mm]	DN [mm]	DN [inch]	PN	Code	SP	GP	kg	
75	65	2 1/2	10	VFA11D750	1	-	1.500	
90	80	3	10	VFA11D900	1	-	1.760	
110	100	4	10	VFA11D910	1	-	1.916	
125 - 140	125	5	10	VFA11D920	1	-	2.725	
160	150	6	10	VFA11D940	1	-	3.600	
* 200 - 225	200	8	6	VFA11D960	1	-	7.600	

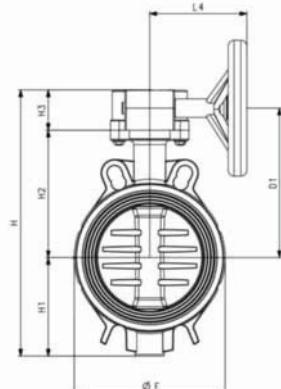

PF 2 02 960 010

d [mm]	D1 [mm]													
75	142.00													
90	147.00													
110	157.00													
125 - 140	177.00													
160	196.50													
* 200 - 225	236.00													



**Kit including backing flanges PVC-U  
Stub and screws**

- (\*) On request

d [mm]	DN [mm]	DN [inch]	PN	Code	SP	GP	kg	
75	65	2 1/2	10	XVFFLIZ75	1	-	3.350	
90	80	3	10	XVFFLIZ90	1	-	3.585	
110	100	4	10	XVFFLIZ91	1	-	4.358	
125	125	5	10	XVFFLIZ92	1	-	4.800	
140	125	5	10	XVFFLIZ93	1	-	4.800	
160	150	6	10	XVFFLIZ94	1	-	7.500	
* 200	200	8	6	XVFFLIZ96	1	-	8.550	
* 225	200	8	6	XVFFLIZ97	1	-	8.550	

PF 2 02 960 010

# Spare parts for butterfly valves



## Handwheel

Suitable for VFA

d [mm]	DN [mm]	Code	SP	GP	
75 - 160	65 - 150	3V0VFVD01	1	10	



## Coloured handle

Suitable for VFA02D

d-d [mm]	DN-DN [mm]	DN-DN [inch]	Code	SP	GP	
75 - 110	65 - 100	2 1/2 - 4	3V0VFMD04	1	15	
125 - 160	125 - 150	5 - 6	3V0VFMD05	1	15	
200 - 225	200 - 200	8 - 8	3V0VFMD06	1	10	



## Handwheel gear box kit

Suitable for VFA

d-d [mm]	DN-DN [mm]	DN-DN [inch]	Code	SP	GP	
75 - 110	65 - 100	2 1/2 - 4	3V0VFRG01	1	20	
125 - 160	125 - 150	5 - 6	3V0VFRG02	1	20	



## Disk seal

Suitable for VFA02D and VFA11

- (\*) Traded items

d [mm]	DN [mm]	DN [inch]	EPDM Code	SP	GP	
* 75	65	2 1/2	2G0VF1OD75	-	-	
* 90	80	3	2G0VF1OD90	-	-	
* 110	100	4	2G0VF1OD91	-	-	
* 125 - 140	125	5	2G0VF1OD92	-	-	
* 160	150	6	2G0VF1OD94	-	-	
* 200 - 225	200	8	2G0VF1OD96	-	-	



## External gasket kit in EPDM/SANTOPRENE™

Suitable for VFA02D and VFA11

- (\*) Traded items

d [mm]	DN [mm]	DN [inch]	Code	SP	GP	
* 75	65	2 1/2	2G0VF1ED75	-	-	
* 90	80	3	2G0VF1ED90	-	-	
* 110	100	4	2G0VF1ED91	-	-	
* 125 - 140	125	5	2G0VF1ED92	-	-	
* 160	150	6	2G0VF1ED94	-	-	
* 200 - 225	200	8	2G0VF1ED96	-	-	



## Actuator fixing bracket

Suitable for VFA

DN [mm]	Code	SP	GP	
65 - 150	3V0VFSG01	1	30	
200	3V0VFSG02	1	30	

# PVC-U Actuated Butterfly Valves

The range of new VFA valves are also available in pneumatic and electric actuated versions from DN 65 to DN 200. The design and operating features of the new VFA valves allow extremely reduced operating torques, supporting the choice of compact, cost effective actuators.

## VFK50

**Butterfly valve with 24V AC electric actuator  
EPDM/SANTOPRENE™ gaskets**

### Electric actuator features:

- Power supply: 24/230V at 50 Hz.
- Operating time: DN 65-80: 50 sec  
DN 100-125: 1 min.  
DN 150-200: 150 sec.
- Fail-safe open: standard
- Auxiliary contacts: 2 standard
- Protection: IP 65
- Connection standard: ISO 5211



## VFK2....

**Butterfly valve with pneumatic actuator  
EPDM/SANTOPRENE™ gaskets**

### Pneumatic actuator features:

- Versions: single/double-acting
- Power supply: filtered compressed air, not necessarily lubricated
- Operating pressure: 6 bar
- Operating temperature for actuator only: from 0°C to + 80°C (from - 20°C to + 80°C in dry air)
- Connection standard: ISO 5211
- Angle of rotation: 90°C
- Namur connector for accessories

VFK.20-21..  
VFK.50..

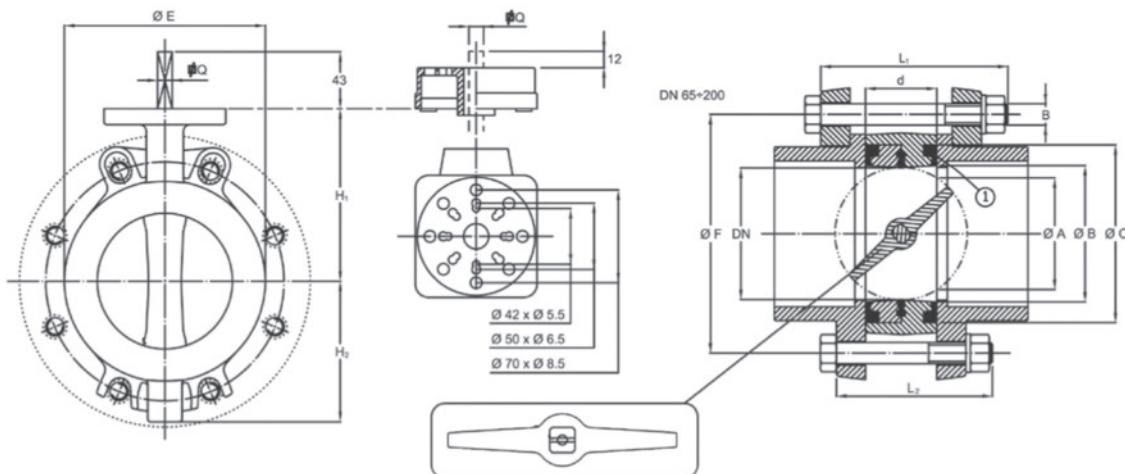

	ISO UNI-DIN PN 10	ISO UNI-DIN PN 16	BS4504 TAB. 16/3 TAB. 10/3	ANSI 150 lbs	JIS	DN	G	D	ΦA	ΦB	ΦC	d	L1	L2	B	ΦE	Q	H1	H2
ΦF	145	145	145	140	140	65	2" 1/2	75	49	73	98	46	130	120	16	112	11	115	76
	160	160	160	152	-	80	3"	90	64	83	112	48	130	120	16	128	11	120	86
	180	180	181	190	-	100	4"	110	85	103	134	54	150	120	16	152	11	130	106
	210	210	210	216	210	125	5"	125/140	108	129	158	63	160	160	16	177	14	150	116
	240	240	241	241	240	150	6"	160	134	154	190	69	180	180	20	212	14	170	132
	295	295	295	298	-	200	8"	200/225	180	198	232	72	200	200	20	262	17	209	163

## PVC-U actuated butterfly valves

### Butterfly valve electric 24V AC PVC-U With EPDM/SANTOPRENE™ gaskets



PF 2 02 959 010

### Butterfly valve pneumatic PVC-U With EPDM/SANTOPRENE™ gaskets



PF 2 02 959 010

d [mm]	DN [mm]	DN [inch]	PN	Code	SP	GP	kg	
75	65	2 ½	10	<b>VFK50D750</b>	-	-	1.750	
90	80	3	10	<b>VFK50D900</b>	-	-	1.750	
110	100	4	10	<b>VFK50D910</b>	-	-	1.916	
125 - 140	125	5	10	<b>VFK50D920</b>	-	-	0.001	
160	150	6	6	<b>VFK50D940</b>	-	-	0.001	
* 200 - 225	200	8	6	<b>VFK50D960</b>	-	-	0.001	

d [mm]	DN [mm]	DN [inch]	PN	ACTING TYPE	Code	SP	GP	kg	
75	65	2 ½	10	DOUBLE	<b>VFK20D750</b>	-	-	2.600	
90	80	3	10	DOUBLE	<b>VFK20D900</b>	-	-	2.600	
110	100	4	10	DOUBLE	<b>VFK20D910</b>	-	-	3.016	
125 - 140	125	5	10	DOUBLE	<b>VFK20D920</b>	-	-	0.001	
160	150	6	6	DOUBLE	<b>VFK20D940</b>	-	-	0.001	
200 - 225	200	8	6	DOUBLE	<b>VFK20D960</b>	-	-	6.700	
75	65	2 ½	10	SINGLE	<b>VFK21D750</b>	-	-	2.600	
90	80	3	10	SINGLE	<b>VFK21D900</b>	1	1	0.001	
110	100	4	10	SINGLE	<b>VFK21D910</b>	-	-	0.001	
125 - 140	125	5	10	SINGLE	<b>VFK21D920</b>	-	-	4.516	
160	150	6	6	SINGLE	<b>VFK21D940</b>	-	-	0.001	
200 - 225	200	8	6	SINGLE	<b>VFK21D960</b>	-	-	9.250	

Pobrano ze strony:  
**[gambitsystems.pl](http://gambitsystems.pl)**

